


SANDWICH PANEL PWPIR-S

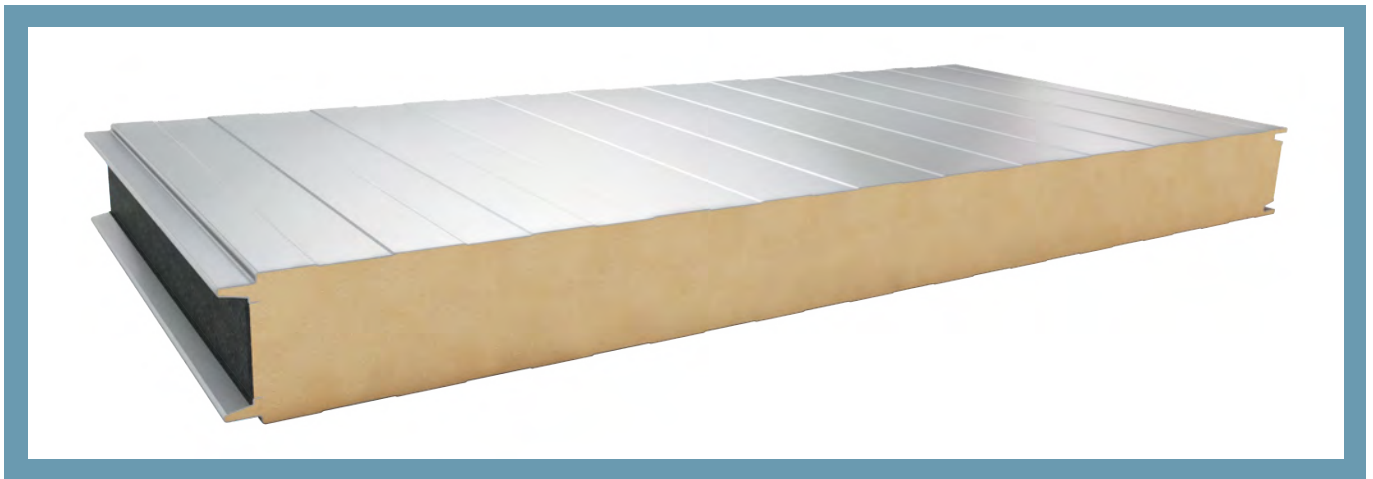

Panels connection scheme

APPLICATION

Wall sandwich panel with visible joint PWPIR-S is used to construct external walls and internal partitions in the single- or multiple-span shell structure.

The panel can be installed both vertically and horizontally. PWPIR-S panel is characterized by very good thermal insulation properties and strength, as well as very high fire resistance properties. The core of the panel comprises polyisocyanurate foam (PIR) of 40 kg/m³ in total density. PWPIR-S panel is compatible with wall panel with mineral wool core type PWW-S, PWW-S LITE and with wall panel with expanded polystyrene core type PWS-S.

AVAILABLE PROFILATION TYPES

EXTERNAL PROFILATION

- L** - LINEAR
- MF** - MICROWAVE
- ML** - MICROLINEAR
- G** - SMOOTH
- MR** - MICROGROOVE
- C** - CARBON

INTERNAL PROFILATION

- L** - LINEAR
- R** - GROOVE
- G** - SMOOTH

TABLE OF TECHNICAL PARAMETERS OF THE PWPIR-S PANELS

Parameter	Value				
thickness [mm]	40	60	80	100	120
modular width [mm]	1130, 1000 (optionally 1050) ¹⁾				
length ²⁾ [mm]	2000 ÷ 15800				
weight ³⁾ [kg/m ²]	9,9	10,7	11,5	12,3	13,1
heat transfer coefficient U _c [W/m ² K]	0,58	0,37	0,27	0,22	0,18
acoustic insulation R _w [dB]	26				
reaction to fire	B-s1,d0				
resistance to external fire ⁴⁾	NRO				
wall fire rating ⁵⁾	NPD	EI 15 (o ↔ i) ⁵⁾	EI 15 / EI 30 (o ↔ i) ⁵⁾	EI 30 (o ↔ i) ⁵⁾	
anti-corrosive protection	depending on the coating used ⁶⁾				
organic coatings	SP25, PU, AGRO, FOOD SAFE and other ⁶⁾				
external facing	galvanized steel 0,5 ÷ 0,6 mm ⁷⁾				
internal facing	galvanized steel 0,4 ÷ 0,6 mm ⁷⁾				
available profilation types	external facing L, ML, MR ⁸⁾ , G ⁹⁾ , C; internal facing L, R ⁹⁾ , G ⁹⁾				
insulating core	rigid foam of 40 kg/m ³ in total density and with enclosed PIR (polyisocyanurate) cells				
application	non-continuous application on external walls and as wall cladding, on the structural parts of walls and ceilings				
wall application layout	vertical or horizontal				

¹⁾ In order to verify the feasibility of a given order, please contact our Customer Service Department or Sales Representative.

²⁾ length depends on the color of the external facing and the thickness of the panel

³⁾ average weight of a sandwich panel with 0.5 mm outer facing, including product tolerance

⁴⁾ fire rating concerning the propagation of fire by the wall when the fire acts towards the outside. This property applies to the Polish territory only and is not CE-marked.

⁵⁾ detailed information (including panel layout and support spans) can be found in the General Terms and Conditions of Sale available at paneltech.pl.

⁶⁾ organic coat selected on the basis of durability and application conditions. Coat selection is carried out through environmental assessment and basing on an environmental questionnaire completed by the Client, approved by the steel manufacturer and Paneltech

⁷⁾ other steel types are selected according to application conditions and approved by Paneltech

⁸⁾ detailed information on the MR – microgroove profilation will be provided at individual request

⁹⁾ facings with the G – smooth or R – groove profiles can include microwaves, which affect the appearance of the product classified as compliant with the requirements of EN 14509, annex D.